


Particle Monitor

OPCom Particle Monitor

Continuous Oil Condition Monitoring



OPCom Particle Monitor

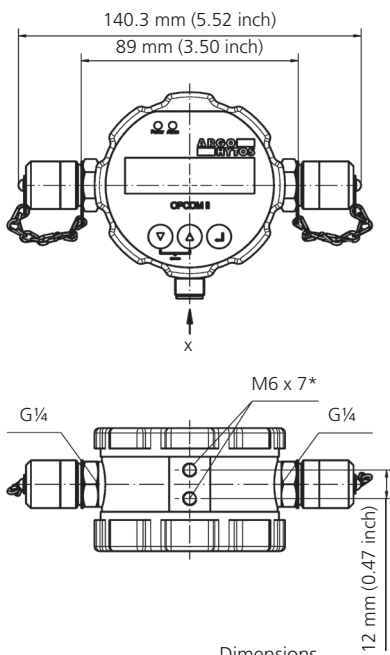

* mm

Dimensions

Description

Application area

The OPCom Particle Monitor is a compact particle measurement device for continuous monitoring of contamination and wear in hydraulic fluids and lubricants.

Performance features

Recognizing changes

Particle monitors precisely display any change in contamination of a system. Thus you can react quickly with an increase in particle concentration and countermeasures can be taken. Subsequent damages are minimized and costs are reduced.

High pressure range

The OPCom Particle Monitor is designed for operating with high pressure. Thus it can directly be mounted to a pressure line.

Intuitive operating

The OPCom Particle Monitor is equipped with an intensely illuminated graphic display and a keypad by which you may set up all required adjustments. The menu navigation is made up intuitively and logically.

Wide communication possibilities

Depending on sensor variant, the OPCom Particle Monitor exports data to a serial interface or optionally to a CAN-Bus (CANopen or SAE J1939), IO-Link, configurable 4-20mA analog output and digital IO. Over a digital alarm output you will be warned when limits are exceeded or fallen below. Readings can run time-controlled, manually or started and stopped over a digital input. The data can also be stored on the integrated memory unit.

Design characteristics

The fluid side, the OPCom Particle Monitor is equipped with two Minimes connections to connect the sensor generally in the off-line circuit to the system. The electrical connection is installed via an 8-pole or 4-pole M12x1 A-coded connector. The integrated data memory allows data recording over a longer period. Besides all its technical functions, the OPCom Particle Monitor scores by its compact and optical design.

Measuring principle

The OPCOM Particle Monitor is an optical particle monitor which works to a so-called light extinction principle. This means that particles are classified within a measuring cell with the help of a laser regarding their size and quantity. The device is calibrated to ISO 11943. It calculates and displays results according to ISO 4406:99, SAE AS 4059, NAS 1638 und GOST 17216. More details and conversion tables: see manual.

Software

A PC-software for data recording and evaluation of the measured values can be downloaded from our website at www.argo-hytos.com > Products > Sensors & Measurements > Software.

Versions

The OPCOM Phosphate Ester version has specially been developed for use in phosphate ester fluids. This version is delivered without Minimesse couplings. Another variant is the OPCOM without display.

Warnings

- › Avoid contact of phosphate ester fluids with the housing of the device.
- › Device can contain remains of the calibration fluid.

Technical data

Sensor data	Size	Unit
<i>Max. operating pressure</i>		
dynamic	420 (6090)	bar (psi)
static	600 (8700)	bar (psi)
Permissible flow rate	50 ... 400	ml/min
<i>Operating conditions</i>		
Temperature	-20 ... +85 (+4 ... +185)	°C °F
Rel. humidity	0 ... 100	% r.H. (non-condensing)
Display readable up to	+60 (+140)	°C °F
Compatible fluids excluding water-based types	mineral oils (H, HL, HLP, HLPD, HVLP), synthetic esters (HETG, HEPG, HEES, HEPR), polyalkylenglycols (PAG), zinc and ash-free oils (ZAF), polyalphaolefins (PAO) phosphate ester* ¹	
Wetted materials	Stainless steel, sapphire, chrome, FFKM* ¹ , NBR* ² , Minimesse coupling* ² : zinc/nickel	
Protection class ¹	IP67	-
Power supply	9 ... 33	V
Power input	max. 0.3	A
Max. power consumption	2	W

Sensor data	Size	Unit
<i>Output</i>		
Power output ²	4 ... 20	mA
Accuracy power output ²	± 2	%
Interfaces	RS 232/CANopen/ SAE J1939 IO-Link V1.1	-
Alarm contact	Open Collector	-
<i>Digital input for start and stop</i>		
Power supply	9 ... 33	V
Data memory	3000	data records
<i>Connecting dimensions</i>		
Fluid connections	G¼ Minimesse* ² M16x2	inch -
Electrical connection		
RS232 / CAN	M12 x 1, 8-pole	-
IO-Link	M12 x 1, 4-pole	-
Tightening torque		
M12-connection	0.1	Nm
<i>Display particle measurement</i>		
ISO 4406:99	0 ... 28 (calibrated area 10... 22)	ordinal number (OZ)
SAE AS 4059E	000 ... 12	ordinal number (OZ)
NAS 1638 (based) ³	00 ... 12	ordinal number (OZ)
GOST 17216 (based) ³	00 ... 17	ordinal number (OZ)
Size channels	4, 6, 14, 21	µm (c)
<i>Measuring accuracy</i>		
Particle measurement (in calibrated area)	±1	ordinal number (OZ)
Weight	~720	g

¹ With screwed-on connector

² Output IOut is freely configurable (see interfaces and communication commands)

³ From software version 2.02.15 upwards

*¹ only applies to phosphate ester version

*² only applies to OPCOM Particle Monitor & OPCOM without display

Order code

OPCOM Particle Monitor	SPCO 300-1000
OPCOM Particle Monitor for phosphate ester	SPCO 300-2000
OPCOM Particle Monitor without display	SPCO 300-1200
OPCOM Particle Monitor IO-Link	SPCO 300-1050
OPCOM Particle Monitor for phosphate ester IO-Link	SPCO 300-2050
OPCOM Particle Monitor without display IO-Link	SPCO 300-1250

Accessories

Complete data cable set, M12x1, 8-pin, A-coded 5 m (16 ft) length	SCSO 100-5030
Data cable with open ends, M12x1, 8-pin, A-coded 5 m (16 ft) length	SCSO 100-5020
Female cable connector M12x1, 8-PIN, A-coded for connection of a data cable	SCSO 100-5010
USB adapter - RS 232 serial	PPCO 100-5420
Power supply	SCSO 100-5080
Ethernet - RS 232 gateway	SCSO 100-5100
Display and storage device LubMon Visu	SCSO 900-1000
LubMon Visu, Ethernet	SCSO 900-1010
LubMon Connect	SCSO 700-1000
LubMon PClight software	free download
LubMon Config software	free download
Minimess connection with volume flow limiting* ²	
Pressure range 1: 2 ... 50 bar (29 ... 725 psi)	SPCO 300-5105
Pressure range 2: 50 ... 400 bar (725 ... 5800 psi)	SPCO 300-5140
Minimess connection with control loop* ²	SPCO 300-5100

*¹ only applies to phosphate ester version

*² only applies to OPCom Particle Monitor & OPCom without display